

IMPORTANT INFORMATION


Note! Please visit www.jeld-wen.com for additional resources and complete instructions. We have How-To videos and written Product Guides available for most products. Contact us for more information.

INCLUDED PARTS


- Lock assembly
- (2) Lock screws

PATIO DOOR LOCK REPLACEMENT

1. Unlock and open the patio door.
2. While holding both handles in place use the Phillips head screwdriver to remove the screws.

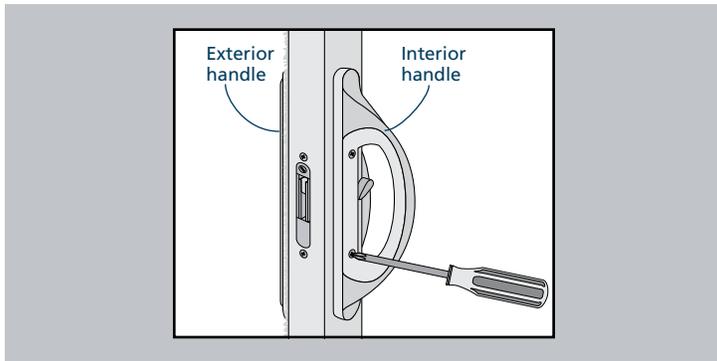

3. Remove both handles.
4. Move the lock lever down to extend the lock and remove lock lever.

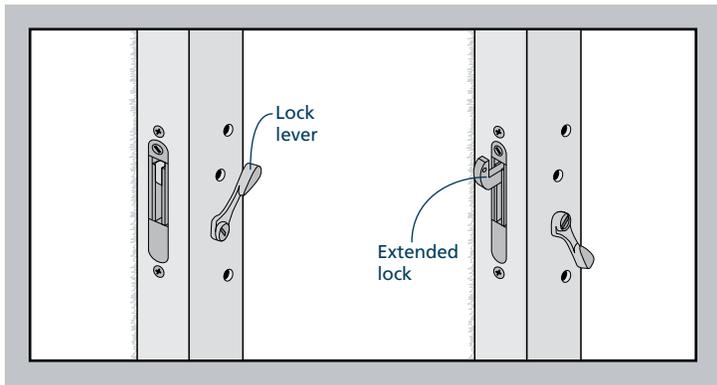


PRECAUTIONS AND SAFETY

- Use proper and safe equipment and protective gear as necessary.


NEEDED TOOLS

- Phillips head screwdriver
- Small screwdriver or punch

5. Place a screwdriver in the top or bottom hole to secure the stiffener from moving.
6. While holding the extended part of the lock, remove both screws.

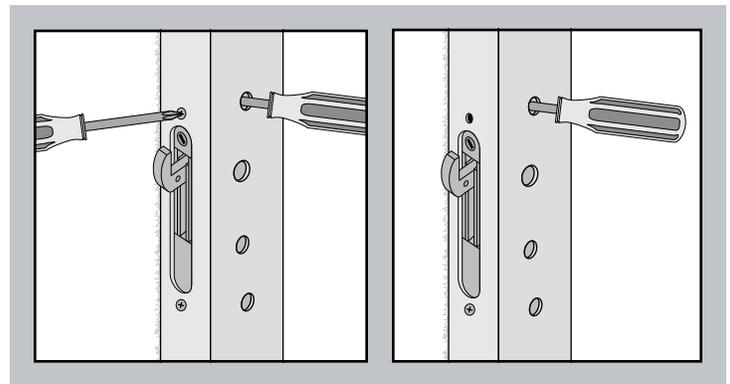

7. Push the bottom of the lock inward and down, then tilt the top out and remove.
8. Reverse these steps to install the new lock.
9. Once the lock is secure, remove the small screwdriver from the panel.

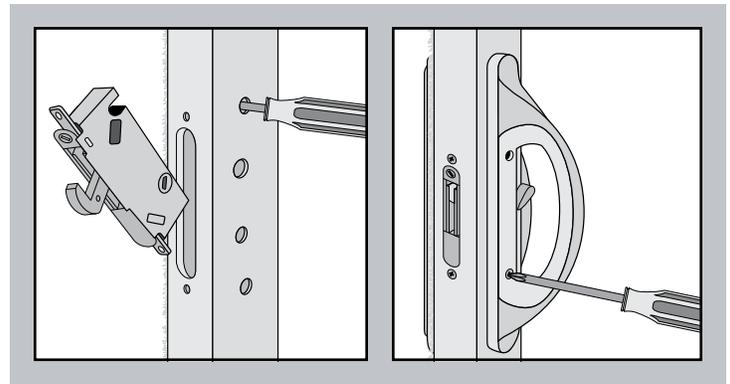

10. Place the lock lever in the third hole from the top.
11. Place the studs of the exterior and interior handle in the alignment holes and hold in place.
12. Install the two screws securing the handles.
13. Close the door and test for proper operation.

The advice offered herein can be done by a homeowner with some mechanical aptitude. If you are unsure, it is recommended that you hire a trained service provider such as a competent and licensed construction contractor or building professional. JELD-WEN disclaims any and all liability associated with the use and/or provision of these instructions. Any reliance upon the information or advice is at the risk of the party so relying. The information contained herein may be changed from time to time without notification.